

BOTTLE COOLER TECHNICAL DATASHEET


BC1 / BC1 H850 BOTTLE COOLER



BC2 / BC2 H850 BOTTLE COOLER



BC3 / BC3 H850 BOTTLE COOLER

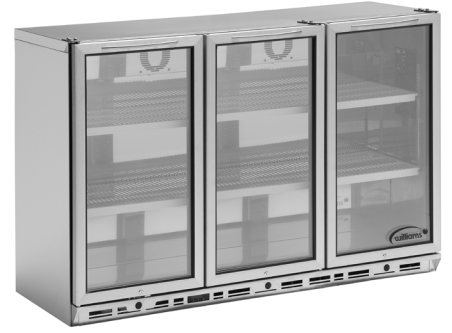

BC1 / BC1 H850

Dimensions (mm)	External	Internal
Width	600	530
Depth	529	400(max) 253(min)
Height	900**	740**
Door Opening	1100	
Capacity	330ml bottles + cans	
Standard Height		96 + 21
H850 models		94 + 31

BC2 / BC2 H850

Dimensions (mm)	External	Internal
Width (per section)	900	377*
Depth	529	400(max) 253(min)
Height	900**	740**
Door Opening	950	
Capacity	330ml bottles + cans	
Standard Height		143 + 36
H850 models		140 + 46

BC3 / BC3 H850

Dimensions (mm)	External	Internal
Width (per section)	1352	377*
Depth	529	400(max) 253(min)
Height	900**	740**
Door Opening	950	
Capacity	330ml bottles + cans	
Standard Height		231 + 54
H850 models		203 + 105

*Per Section

**Height of all 850 models : External = 850mm ; Internal = 690mm

KEY FEATURES

- Choice of exterior finishes - black PVC coated galvanised steel or stainless steel
- Hard wearing exterior with hygienic, easy to clean mirrored stainless steel interior
- CoolSmart controller
- Designed and engineered to operate efficiently up to a 32°C ambient.
- Precision injected, high density 35mm polyurethane insulation
- Castors to rear, adjustable feet to front
- Barrel locked doors
- Double glazed doors and bright, low energy consumption lighting
- Fully adjustable nylon coated wire shelves to suit stacking requirements
- Connection to third party supervisory communication systems such as BMS is possible using proprietary equipment. Please contact Williams for more information.

OPTIONS

- Solid doors (available in stainless steel and black finish)
- Wine shelves



BOTTLE COOLERS TECHNICAL DATA

Bottle Coolers	BC1 / BC1 H850	BC2 / BC2 H850	BC3	BC3 H850
Temperature (°C)	+4/+10	+4/+10	+4/+10	+4/+10
Power Supply	220V/240V 50Hz/1Ph			
Fuse (Amps)	13	13	13	13
Defrost	Auto defrost and evaporation			
Fittings				
Shelves	2	4	6	6
Electrical Data - Standard Refrigerant				
Refrigerant	R600a	R600a	R290	R290
Energy Efficiency Class	E	D	E	F
Energy Consumption (kW / 24hrs)*	1.58	1.70	2.73	2.73
Start Up (Amps)	3.7	6	6.6	6.6
Running (Amps)	0.5	1	1.1	1.1
Heat Rejection (Watts)**	194	318	692	692

IMPORTANT NOTES:

*Energy consumption is tested to BS EN 16902:2016

**Evaporating at -10°C in 32°C Ambient

All refrigeration equipment requires adequate ventilation for efficient and effective performance.

Williams is committed to a policy of continual product development and innovation. As such, we reserve the right to change product specifications stated without prior notice.

Williams Refrigeration
Bryggen Road,
North Lynn Industrial Estate
King's Lynn, Norfolk. PE30 2HZ

T +44(0) 1553 817 000
Spares: +44(0) 1553 817 017
E info@williams-refrigeration.co.uk
W www.williams-refrigeration.co.uk

